



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
50	55	40	236	490	0,12	PCM 505540 M

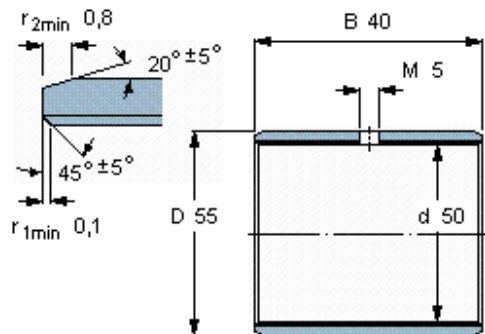

Specific load factor K 120
Material constant K_M 1900