



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
12	14	20	15	1	12,5	39	9,15	28,5	0,0061	PCMF 121415 E

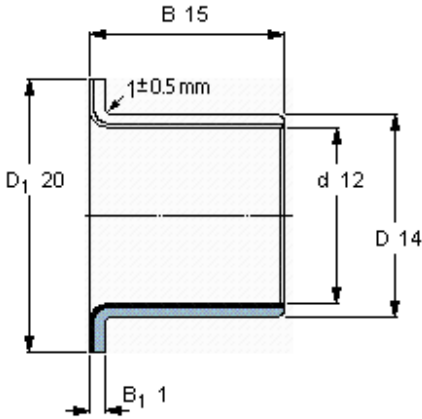

Specific load factor K 80
Material constant K_M 480