



Composite dry sliding bushings, metric dimensions

| Principal dimensions | | | Basic load ratings | | Mass | Designation |
|----------------------|----|----|--------------------|--------------|-------|--------------|
| d | D | B | dynamic C | static C0 | | |
| mm | | | kN | | kg | - |
| 35 | 39 | 30 | 122 | 255 | 0,047 | PCM 353930 M |

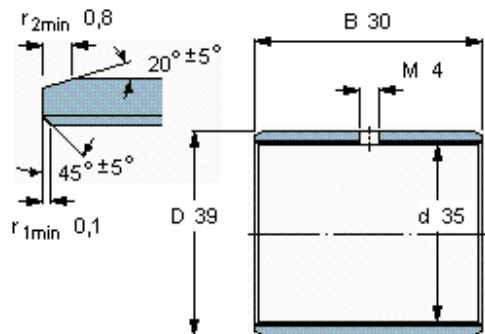

Specific load factor K 120
Material constant K_M 1900