


Composite dry sliding bushings, metric dimensions

| Principal dimensions |    |   | Basic load ratings |              | Mass  | Designation  |
|----------------------|----|---|--------------------|--------------|-------|--------------|
| d                    | D  | B | dynamic<br>C       | static<br>C0 |       |              |
| mm                   |    |   | kN                 |              | kg    | -            |
| 10                   | 12 | 8 | 6,4                | 20           | 0,002 | PCM 101208 E |

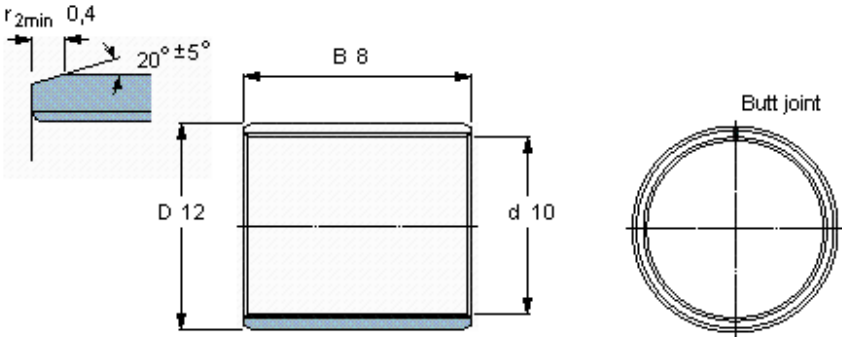

|                      |                    |
|----------------------|--------------------|
| Specific load factor | K 80               |
| Material constant    | K <sub>M</sub> 480 |