


Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0		
mm			kN		kg	-
25	28	30	58,5	183	0,028	PCM 252830 E

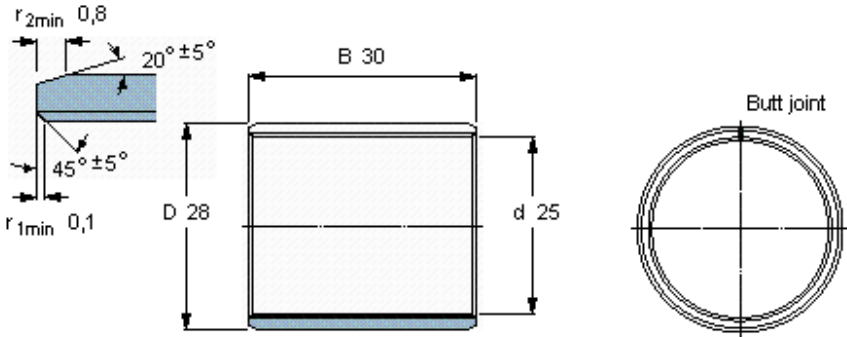

Specific load factor	K 80
Material constant	$K_M 480$