



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
<b>60</b>	65	70	500	1040	0,24	PCM 606570 M

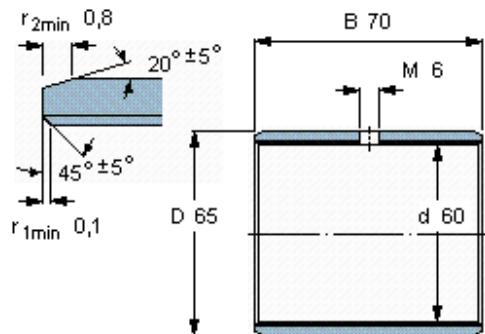

**Specific load factor** K 120  
**Material constant**  $K_M$  1900