


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
35	80	31	26,5	8,5	-	5600	2307 E-2RS1TN9

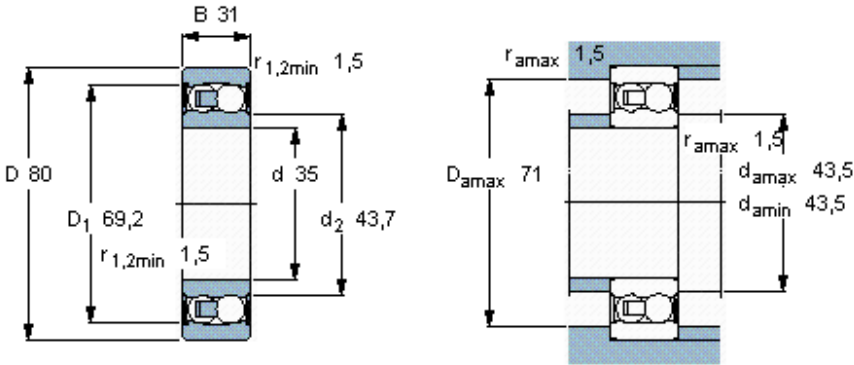

Calculation factors

- k_r 0,05
- e 0,25
- Y₁ 2,5
- Y₂ 3,9
- Y₀ 2,5