



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
14	16	15	25	52	0,004	PCM 141615 M

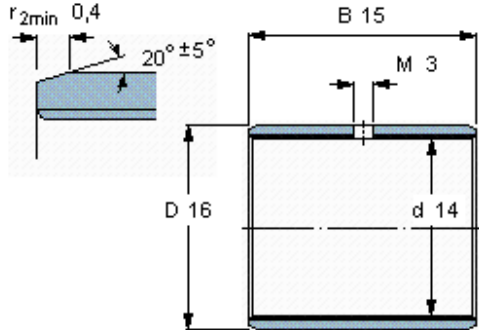

Specific load factor K 120
Material constant K_M 1900