



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D ₁	B	B ₁	radial dynamic C	static C ₀	axial dynamic C _a	static C ₀	kg	-
mm					kN					
20	23	30	21,5	1,5	30,5	95	17,3	54	0,021	PCMF 202321.5 E

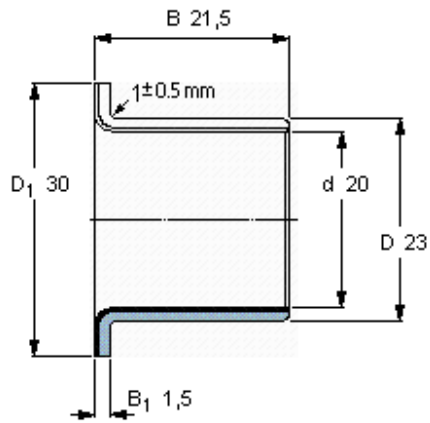

Specific load factor
Material constant

K 80
K_M 480