


Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings		Designation
F _w	D	C	dynamic C	static C ₀	Reference speed	Limiting speed	
mm			kN		r/min		-
48	62	40	67,1	125	8000	9500	RNA 6908

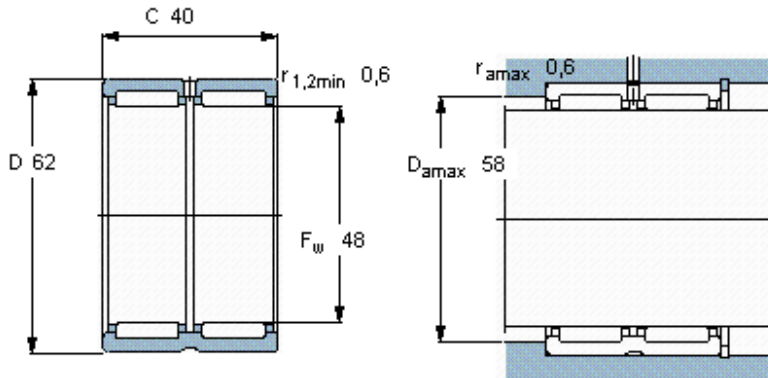

Appropriate seals

G seal	-
SD seal	-
CR seal	48x62x8 HMS5 RG