


# KRVE 22 PPA

## Dimensions

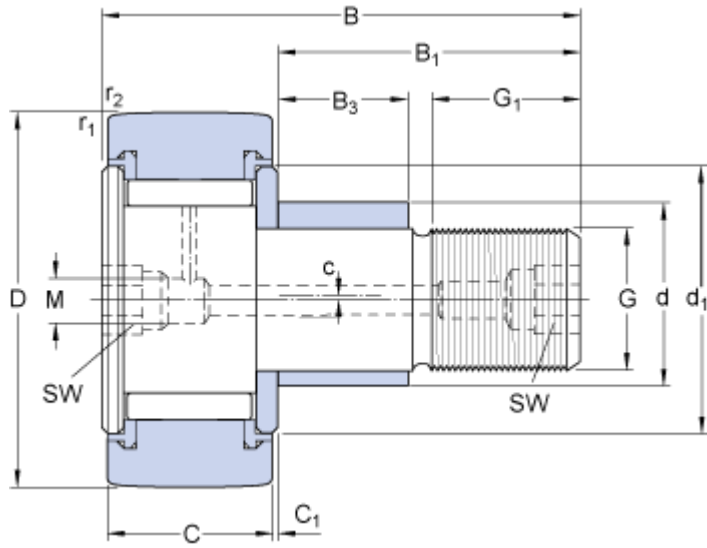

D	22	mm
d	13	mm
B	36	mm
C	12	mm
B <sub>1</sub>	23	mm
B <sub>3</sub>	10	mm
C <sub>1</sub>	0.6	mm
d <sub>1</sub>	17.5	mm
G	M 10x1	
G <sub>1</sub>	12	mm
M	4	mm
SW	5	mm
c	0.5	mm
r <sub>1,2</sub>	min.	0.3

## Calculation data

Basic dynamic load rating	C	6	kN
Basic static basic load rating	C <sub>0</sub>	9.2	kN
Fatigue load limit	P <sub>u</sub>	1	kN
Maximum dynamic radial loads	F <sub>r</sub>	5.7	kN
Maximum static radial loads	F <sub>0r</sub>	8.2	kN
Limiting speed		3600	r/min

## Mass

Mass cam follower	0.049	kg
-------------------	-------	----

## Mounting information

Recommended tightening torque	15	N·m
-------------------------------	----	-----

## Appertaining products

Grease fitting

NIP A1x4.5

Hexagonal nut

M 10x1