



FAG

NJ2310-E-XL-M1

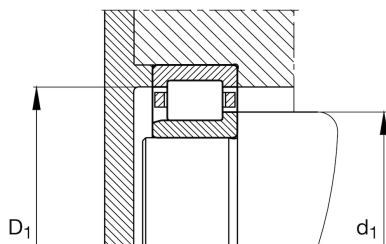
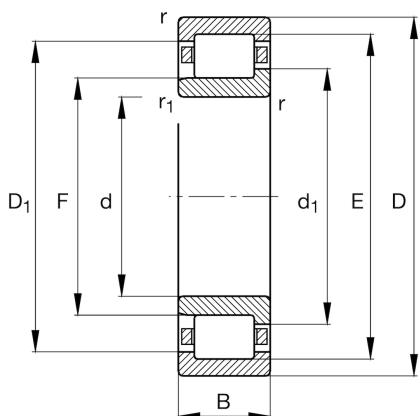
Cylindrical roller bearing

Materiálové číslo Schaeffler:
0167354800000

Cylindrical roller bearing NJ..-E-XL-M1, with cage, single row, semi-locating bearing, 2 ribs on outer ring, 1 rib on inner ring, type NJ

X-life

Technické informace

**Main Dimensions & Performance Data**

d	50 mm	Bore diameter
D	110 mm	Outside diameter
B	40 mm	Width
C_r	193.000 N	Basic dynamic load rating, radial
C_{0r}	187.000 N	Basic static load rating, radial
C_{ur}	35.500 N	Fatigue load limit, radial
n_G	11.600 1/min	Limiting speed
n_{gr}	4.900 1/min	Reference speed
$\approx m$	1,93 kg	Hmotnost

Mounting dimensions

$d_{a \min}$	61 mm	Minimum diameter shaft shoulder
$d_{a \max}$	63 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	99 mm	Maximum diameter of housing shoulder
$d_{c \min}$	73 mm	Minimum shaft shoulder
$r_{a \max}$	2 mm	Maximum recess radius

Dimensions

r_{\min}	2 mm	Minimum chamfer dimension
$r_{1 \min}$	2 mm	Minimum chamfer dimension
s	3,2 mm	Axial displacement
E	97 mm	Raceway diameter outer ring
F	65 mm	Raceway diameter inner ring
$D_{1 \min}$	92,48 mm	Minimum rib diameter outer ring
d_1	71,25 mm	Maximum rib diameter inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	150 °C	Operating temperature max.

Additional information

HJ2310-E

L-washer

